



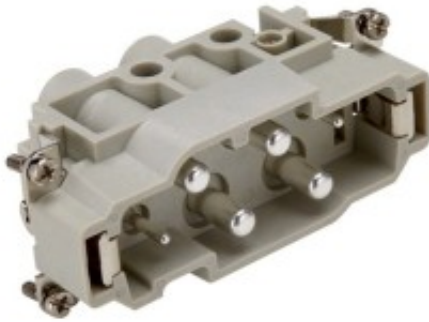

Combination insert Power and Control

Power and control in one connector insert; Best in combination with ÖLFLEX® SERVO

- Combination insert Power and Control



Product description

Application range

- Mechanical engineering
- Renewable energy
- Control engineering

Benefits

- Power and control in one connector insert
- Best in combination with ÖLFLEX® SERVO

Technical Data

Rated voltage (V)

830 V Power

Rated impulse voltage	400 V Control
Rated current (A)	8 kV
	80 A Power
	16 A Control
Contact resistance	< 5 mOhm
Number of contacts	4 + 2 + PE
Termination methods	Screw termination: 1.5 - 16.0 mm ²
Material	PC, polycarbonate
Cycle of mechanical operation	500
Temperature range	-40°C ... +125°C
Degree of soiling	3