

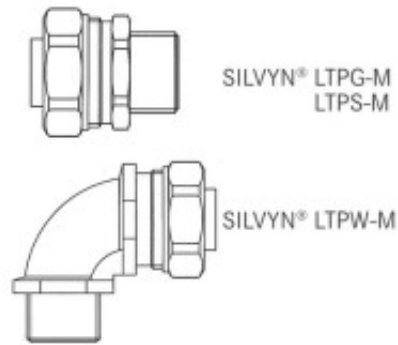




Protects against liquids; High-tensile; Robust; High crush-resistance; Largely resistant to oil and acids, UV-resistant



Product description

Application range

- Mechanical engineering
- Outdoors
- Transformer construction
- Railway applications
- Paper industry

Benefits

- Protects against liquids
- High-tensile
- Robust
- High crush-resistance
- Largely resistant to oil and acids, UV-resistant

Product Make-up

- Spirally-wound heavy metal protective conduit with roughened profile

-
- Plastic outer sheath

Technical Data

Approvals	IEC EN 61386-23
Colour delivered	Black (RAL 9005), UV-resistant
Material	Steel, galvanised PVC sheath
Temperature range	-20°C to +105°C